


Foodstuff Delivery



TUBE : WHITE COLOUR NON-TOXIC, TASTE AND ODOUR FREE, NATURAL RUBBER.
 REINFORCEMENT : HIGH TENSILE SYNTHETIC TEXTILE.
 COVER : WEATHER, OZONE AND ABRASION RESISTANT, SPECIAL SYNTHETIC RUBBER.
 APPLICATION : FOR DISCHARGE OF FOODSTUFF, SUCH AS WATER, FRUIT JUICES, ETC. NOT RECOMMENDED FOR OILY OR FATTY FOODS.

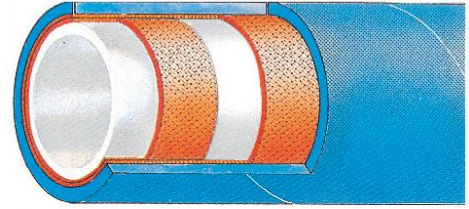

SEELE : GESCHMACKS- UND GERUCHSNEUTRAL, SPEZIELLER NATURGUMMI, WEISS, SCHADSTOFFFREI.
 EINLAGE : HOCHZUGFESTE SYNTHETISCHE TEXTILEINLAGE.
 DECKE : OZON-UND WITTERUNGSBESTÄNDIGER, ABRIEBSFESTER, SPEZIELLER SYNTHETISCHER GUMMI.
 ANWENDUNG : ZUM DURCHLEITEN VON GETRÄNKEN WIE WASSER, FRUCHTSÄFTE, USW. UNGEEIGNET FÜR ÖL- UND FETTHALTIGE PRODUKTE



SOTTOSTRATO : GOMMA NATURALE BIANCA ATOSSICA, DI QUALITÀ ALIMENTARE INSAPORE ED INODORE.
 RINFORZO : INSERZIONI TESSILI AD ALTA TENACITÀ.
 COPERTURA : GOMMA SPECIALE SINTETICA, RESISTENTE ALL'ABRASIONE, ALL'OZONO ED AGLI AGENTI ATMOSFERICI.
 IMPIEGO : PER MANDATA DI PRODOTTI ALIMENTARI COME, ACQUA, SUCCHI DI FRUTTA, ETC. NON CONSIGLIABILE PER PRODOTTI CONTENENTI GRASSI.



TUBE : CAOUTCHOUC NATUREL COULEUR BLANCHE, NON TOXIQUE, ANTI ODEUR ET NE TRANSMETTANT PAS DE GOUT.
 RENFORCEMENT : INSERTION TEXTILE HAUTE TENACITE.
 REVETEMENT : CAOUTCHOUC SYNTHETIQUE SPECIAL, RESISTANT A L'ABRASION, A L'OZONE ET AUX AGENTS ATMOSPHERIQUES.
 APPLICATION : POUR REFOULEMENT DE PRODUITS ALIMENTAIRES NON GRAS, EAUX, JUS DE FRUITS, ETC.

ID		OD		WP		BP		W	L
inch	mm	mm	mm	bar	psi	bar	psi	g/m	m

6 BAR

3/4"	19	28.5	6	87	18	261	531	40-46-61
1"	25.4	35	6	87	18	261	675	40-46-61
1 1/4"	32	43	6	87	18	261	994	40-46-61
1 1/2"	38	49	6	87	18	261	1142	40-46-61
1 3/4"	44.5	55.5	6	87	18	261	1315	40-46-61
2"	50.8	62	6	87	18	261	1510	40-46-61
2 1/2"	63.5	75	6	87	18	261	1870	40-46-61
3"	76.2	89	6	87	18	261	2418	40-46-61
4"	101.6	115	6	87	18	261	3315	40-46-61

10 BAR

3/4"	19	30	10	145	30	435	625	40-46-61
1"	25.4	37	10	145	30	435	810	40-46-61
1 1/4"	32	44	10	145	30	435	1055	40-46-61
1 1/2"	38	51	10	145	30	435	1335	40-46-61
1 3/4"	44.5	57.5	10	145	30	435	1530	40-46-61
2"	50.8	65	10	145	30	435	1870	40-46-61
2 1/2"	63.5	77.5	10	145	30	435	2285	40-46-61
3"	76.2	92	10	145	30	435	2975	40-46-61
4"	101.6	117.5	10	145	30	435	3935	40-46-61



-40°C / + 80°C
 -40°F / +176°F

Sanification : Max. 110 °C for 15 min. with steam, max. 40 °C for 15 min. with caustic soda (5%).
 Sterilisation : Bei max. 110 °C für 15 min. mit dampf, bei max. 40 °C für 15 min. mit natronlauge (5%).
 Sanificazione : Massimo 110 °C per 15 minuti con vapore, massimo 40 °C per 15 minuti con soda caustica (5%).
 Sanification : 110 °C max. pendant 15 min. avec vapeur à 40 °C max. pendant 15 min. avec soude caustique (5%).

MARKING / BESCHRIFTUNG / MARCATURA / MARQUAGE: **TRANSFER TAPE OR EMBOSSED**



NORMS NORMEN NORME NORMES	ISO 1307 MEETS FDA REQUIREMENTS	COLOUR FARBEN COLORI COULEUR	
------------------------------------	------------------------------------	---------------------------------------	--