


Foodstuff Delivery

UHMW-PE



TUBE : WHITE COLOUR NON-TOXIC, TASTE AND ODOUR FREE, UHMW-PE.
 REINFORCEMENT : HIGH TENSILE SYNTHETIC TEXTILE.
 COVER : WEATHER, OZONE AND ABRASION RESISTANT, SPECIAL SYNTHETIC RUBBER.
 APPLICATION : FOR DISCHARGE OF FOODSTUFF WITH HIGH PERCENTAGE OF ALCOHOL (UP TO 99%). FOR USE SPECIALLY IN BREWERIES, DISTILLERIES.

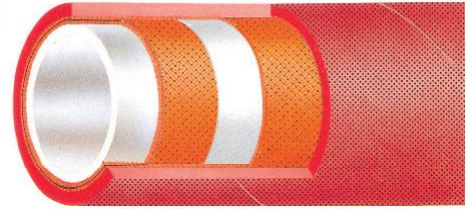

SEELE : GESCHMACKS- UND GERUCHSNEUTRAL, WEISS, SCHADSTOFFFREI, UHMW-PE.
 EINLAGE : HOCHZUGFESTE SYNTHETISCHE TEXTILEINLAGE.
 DECKE : OZON-UND WITTERUNGSBESTÄNDIGER, ABRIEBSFESTER, SPEZIELLER SYNTHETISCHER GUMMI.
 ANWENDUNG : ZUM DURCHLEITEN VON FLÜSSIGKEITEN MIT HOHEM ALKOHOLANTEIL (BIS ZU 99 %) SPEZIELL FÜR BRAUEREIEN UND BRENNEREIEN



SOTTOSTRATO : UHMW-PE ATOSSICO, DI QUALITÀ ALIMENTARE INSAPORE ED INODORE.
 RINFORZO : INSERZIONI TESSILI AD ALTA TENACITÀ.
 COPERTURA : GOMMA SPECIALE SINTETICA, RESISTENTE ALL'ABRASIONE, ALL'OZONO ED AGLI AGENTI ATMOSFERICI.
 IMPIEGO : PER MANDATA DI PRODOTTI ALIMENTARI, VINI E ALCOOL FINO A 99%. PARTICOLARMENTE IDONEO PER L'USO NELLE BIRRERIE E NELLE DISTILLERIE.



TUBE : UHMW-PE COULEUR BLANCHE, NON TOXIQUE, ANTI ODEUR ET NE TRANSMETTANT PAS DE GOUT
 RENFORCEMENT : INSERTION TEXTILE HAUTE TENACITE.
 REVETEMENT : CAOUTCHOUC SYNTHETIQUE SPECIAL, RESISTANT A L'ABRASION, A L'OZONE ET AUX AGENTS ATMOSPHERIQUES.
 APPLICATION : POUR REFOULEMENT DES PRODUITS ALIMENTAIRES, VINS ET ALCOOL JUSQU'A 99%. PARTICULIEREMENT DANS LES BRASSERIES ET DISTILLERIES.

ID		OD	WP		BP		W	L
inch	mm	mm	bar	psi	bar	psi	g/m	m
3/4"	19	30	10	145	30	435	545	40-46-61
1"	25,4	37	10	145	30	435	705	40-46-61
1 1/4"	32	44	10	145	30	435	915	40-46-61
1 1/2"	38	51	10	145	30	435	1135	40-46-61
1 3/4"	44,5	57,5	10	145	30	435	1300	40-46-61
2"	50,8	65	10	145	30	435	1635	40-46-61
2 1/2"	63,5	77,5	10	145	30	435	1890	40-46-61
3"	76,2	92	10	145	30	435	2580	40-46-61
4"	101,6	117,5	10	145	30	435	3500	40-46-61

Sanification : Max. 130 °C for 15 min. with steam, max. 60 °C for 15 min. with caustic soda (5%).
 Sterilisierung : Bei max. 130 °C für 15 min. mit dampf, bei max. 60 °C für 15 min. mit natronlauge (5%).
 Sanificazione : Massimo 130 °C per 15 minuti con vapore, massimo 60 °C per 15 minuti con soda caustica (5%).
 Sanification : 130 °C max. pendant 15 min. avec vapeur à 60 °C max. pendant 15 min. avec soude caustique (5%).



MARKING / BESCHRIFTUNG / MARCATURA / MARQUAGE: **TRANSFER TAPE OR EMBOSSED**



NORMS NORMEN NORME NORMES	ISO 1307 MEETS FDA REQUIREMENTS	COLOUR FARBEN COLORI COULEUR			
------------------------------------	------------------------------------	---------------------------------------	--	--	--

