


# Oil / Din 73379 Type-1A

## Yakıt / Din 73379 Tip-1A



TUBE : FUEL AND OIL RESISTANT, SMOOTH SYNTHETIC NITRILE BLACK RUBBER.  
 REINFORCEMENT : HIGH TENSILE SYNTHETIC TEXTILE.  
 COVER : ABRASION, OZONE, WEATHER AND OIL RESISTANT SPECIAL SYNTHETIC NITRILE RUBBER.  
 APPLICATION : FOR DELIVERY OF FUELS IN INTERNAL COMBUSTION ENGINES FOR LUBRICATION AND GREASING SERVICES.

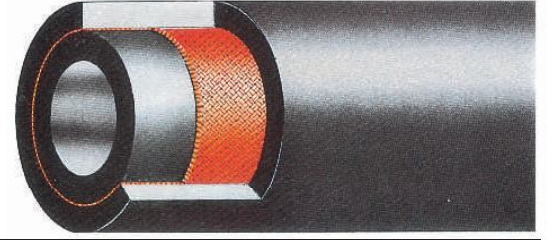

SEELE : ÖL- UND KRAFTSTOFFBESTÄNDIG, ISOLIEREND, NITRILGUMMI, SCHWARZ, GLATT.  
 EINLAGEN : HOCH REISSFESTE SYNTHETISCHE TEXTILEINLAGE.  
 DECKE : ABRIB-, OZON-, WETTER-UND ÖLBESTÄNDIG, SPEZIELLER SYNTHETIK NITRILGUMMI  
 ANWENDUNG : ZUM DURCHLEITEN VON KRAFTSTOFFEN IM KFZ BEREICH.



SOTTOSTRATO : GOMMA NITRILE LISCIA NERA, RESISTENTE AGLI OLI ED AI CARBURANTI.  
 RINFORZO : INSERZIONI TESSILI AD ALTA TENACITÀ.  
 COPERTURA : GOMMA SPECIALE SINTETICA NERA LISCIA IN NITRILE, RESISTENTE AGLI OLI, AI CARBURANTI, ALL'OZONO, ALL'ABRASIONE ED AGLI AGENTI ATMOSFERICI.  
 IMPIEGO : PER MANDATA DEI CARBURANTI NEI MOTORI A COMBUSTIONE INTERNA O PER LUBRIFICAZIONE ED INGRASSAGGIO NEI VARI SERVIZI.



ALT KAT : YAĞLARA VE MAZOTA DAYANIKLI SIYAH DÜZ SENTETİK NİTRİL KAUKÇUK.  
 TAKVIYE : YÜKSEK MUKAVEMETLİ SENTETİK TEKSTİL.  
 ÜST KAT : YAKITLARA, YAĞLARA, HER TÜRLÜ HAVA SARTLARINA, OZONA VE İSİYA DAYANIKLI ÜZERİ DÜZ SIYAH NİTRİL SENTETİK KAUKÇUK.  
 KULLANIM YERİ : İÇTEN YANMALI MOTORLARDA, YAKIT TAHLİYESİNDE, GRES YAĞI VE GENEL YAĞLAMA İŞLERİNDE.

ID/iç	OD/Dç	WP/ÇB		BP/PB		BR/KY/r	W/A	L/B
		bar	psi	bar	psi			
mm	mm	bar	psi	bar	psi	mm	g/m	m
3,5	9,5	10	145	30	435	45	85	10-100
4	10	10	145	30	435	45	91	10-100
4,5	10,5	10	145	30	435	50	98	10-100
4,5	11,5	10	145	30	435	50	121	10-100
5	11	10	145	30	435	55	104	10-100
5	12	10	145	30	435	55	129	10-100
5,5	11,5	10	145	30	435	60	110	10-100
6	12	10	145	30	435	65	117	10-100
7	12	10	145	30	435	70	103	10-100
7	13	10	145	30	435	70	131	10-100
7,3	13,3	10	145	30	435	70	135	10-100
7,3	14,3	10	145	30	435	70	164	10-100
7,5	13,5	10	145	30	435	70	137	10-100
8	14	10	145	30	435	80	143	10-100
8	15	10	145	30	435	80	174	10-100
9	15	10	145	30	435	80	156	10-100
9,5	15,3	10	145	30	435	80	160	10-100
10	16	10	145	30	435	80	170	10-100
10	17	10	145	30	435	80	205	10-100
11	17	10	145	30	435	80	183	10-100
11	18	10	145	30	435	80	221	10-100
11,5	18,5	10	145	30	435	80	229	10-100
12,5	20	10	145	30	435	100	265	10-100
14	22	10	145	30	435	100	313	10-100
16	24	10	145	30	435	125	348	10-80



-40°C / +50°C  
-40°F / +122°F

Other diameters available upon request.

Weitere Abmessungen auf Anfrangfe möglich

Altri diametri realizzabili su richiesta.

Diğer ölçüler istek üzerine üretilebilir.

NORMS  
NORMEN  
NORME  
NORMLAR

DIN 73379 TYPE 1A  
ISO 1307

MARKING  
BESCHRIFTUNG  
MARCATURA  
MARKALAMA

INK-JET  
EMBOSSSED

COLOUR  
FARBEN  
COLORI  
RENKLER

