


Petrol Pump Wrapped Akaryakıt Pompa Bezli



	TUBE REINFORCEMENT COVER APPLICATION	: OIL AND PETROL RESISTANT, CONDUCTIVE SYNTHETIC NITRILE BLACK RUBBER. : HIGH TENSILE SYNTHETIC TEXTILE AND ANTISTATIC COPPER WIRE. : OIL, WEATHER, OZONE, ABRASION RESISTANT, FABRIC IMPRESSION SPECIAL SYNTHETIC RUBBER. : FOR FUEL DISPENSING: REGULAR AND SUPER GRADE PETROL, UNLEADED PETROL AND DIESEL OIL.
	SEELE EINLAGEN DECKE ANWENDUNG	: ÖL- UND KRAFTSTOFFBESTÄNDIG, ISOLIEREND, NITRILGUMMI, SCHWARZ. : HOCH REISSFESTE SYNTHETISCHE TEXTILEINLAGE UND KUPFERLITZE. : ÖL-OZON- UND WITTERUNGSBESTÄNDIG, SPEZIELLER SYNTHETIKGUMMI, STOFFIMPRESSION. : ZAPFSCHLAUCH FÜR TANKSTELLEN: GEEIGNET FÜR KRAFTSTOFFE, NORMAL-, SUPER-, BLEIFREI-BENZIN UND DIESEL.
	SOTTOSTRATO RINFORZO COPERTURA IMPIEGO	: GOMMA NITRILE NERA CONDUTTIVA, RESISTENTE AGLI IDROCARBURI. : INSERZIONI TESSILI AD ALTA TENACITÀ E CORDICELLA DI RAME : GOMMA SPECIALE SINTETICA AD IMPRESSIONE TELA, RESISTENTE AGLI OLI, ALL' OZONO, ALL' ABRASIONE ED AGLI AGENTI ATMOSFERICI. : PER DISTRIBUTORI DEI CARBURANTI: BENZINA, BENZINA VERDE, GASOLIO.
	ALT KAT TAKVİYE ÜST KAT KULLANIM YERİ	: PETROLE, BENZİNE VE MAZOTA DAYANIKLI DÜZ, SİYAH, İLETKEN SENTETİK NİTRİL KAÇUK. : YÜKSEK MUKAVEMETLİ SENTETİK TEKSTİL VE STATİK ELEKTRİĞİ İLETKEN BAKIR TEL. : YAĞLARA, OZONA, HER TÜRLÜ HAVA ŞARTLARINA VE AŞINMAYA DAYANIKLI ÖZEL SENTETİK KAÇUK. : SERVİS İSTASYONLARINDA, POMPALARDAN NAKİL VASITALARINA YAKIT DAĞITMA İŞLERİNDE. (NORMAL-SÜPER-KURŞUNSUZ BENZİN, MAZOT, MOTORİN)

ID/iç		OD/DÇ		WP/ÇB		BP/PB		BR/KY/r		W/A		L/B	
inch	mm	mm	bar	psi	bar	psi	mm	g/m	m				
1/2"	12,7	21,5	16	232	48	696	127	311	+6				
5/8"	16	26	16	232	48	696	160	434	+6				
3/4"	19	29	16	232	48	696	190	496	+6				

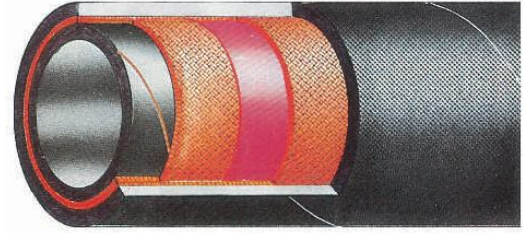

-35°C / +80°C
-31°F / +176°F

NORMS NORMEN NORME NORMLAR	TS 11567 EN 1360 TİP 1 ISO 1307	MARKING BESCHRIFTUNG MARCATURA MARKALAMA	TRANSFER EMBOSSED	COLOUR FARBEN COLORI RENKLER	
-------------------------------------	------------------------------------	---	----------------------	---------------------------------------	--

