


Textile Reinforced Oil Tekstil Takviyeli Yakıt



TUBE : FUEL AND OIL RESISTANT, SMOOTH SYNTHETIC NITRILE BLACK RUBBER.
REINFORCEMENT : HIGH TENSILE SYNTHETIC TEXTILE
COVER : ABRASION, OZONE, WEATHER AND OIL RESISTANT SPECIAL SYNTHETIC RUBBER.
APPLICATION : FOR DELIVERY OF FUELS IN INTERNAL COMBUSTION ENGINES FOR LUBRICATION AND GREASING SERVICES.

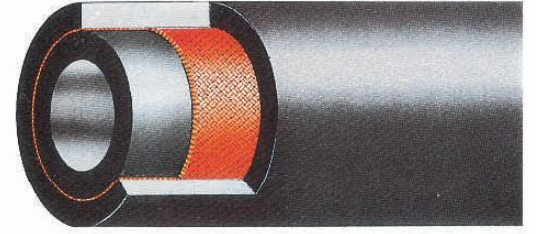

SEELE : KRAFTSTOFF-, UND ÖLBESTÄNDIG, ISOLIEREND, NITRILGUMMI, SCHWARZ, GLATT.
EINLAGEN : HOCH REISSFESTE SYNTHETISCHE TEXTILEINLAGE.
DECKE : ABRIEBFEST, ÖL-, OZON-WITTERUNGSBESTÄNDIG, SPEZIELLER SYNTHETIKGUMMI.
ANWENDUNG : KRAFTSTOFFSCHLAUCH FÜR KFZ UND FETTPUMPEN.



SOTTOSTRATO : GOMMA NITRILE LISCIA NERA, RESISTENTE AGLI OLI ED AI CARBURANTI.
RINFORZO : INSERZIONI TESSILI AD ALTA TENACITÀ.
COPERTURA : GOMMA SPECIALE LISCIA NERA, RESISTENTE AGLI OLI, AI CARBURANTI, ALL'OZONO, ALL'ABRASIONE ED AGLI AGENTI ATMOSFERICI.
IMPIEGO : PER MANDATA DEI CARBURANTI NEI MOTORI A COMBUSTIONE INTERNA O PER LUBRIFICAZIONE ED INGRASSAGGIO NEI VARI SERVIZI.



ALT KAT : YAĞLARA VE MAZOTA DAYANIKLI SIYAH DÜZ SENTETİK NİTRİL KAUCUK.
TAKVİYE : YÜKSEK MUKAVEMETLİ SENTETİK TEKSTİL.
ÜST KAT : YAKITLARA, YAĞLARA, HER TÜRLÜ HAVA ŞARTLARINA, OZONA VE ISIYA DAYANIKLI ÜZERİ DÜZ SIYAH SENTETİK KAUCUK.
KULLANIM YERİ : İÇTEN YANMALI MOTORLARDA YAKIT TAHLİYESİNDE GRES YAĞI VE GENEL YAĞLAMA İŞLERİNDE.

ID/İÇ	OD/DÇ	WP/ÇB		BP/PB		BR/KY/r	W/A	L/B
mm	mm	bar	psi	bar	psi	mm	g/m	m
6	12	10	145	30	435	60	113	10-100
8	14	10	145	30	435	80	138	10-100
10	16	10	145	30	435	100	164	10-100
12,5	20	10	145	30	435	125	256	10-100
16	24	10	145	30	435	160	336	10-80
19	27	10	145	30	435	190	388	10-50
25	35	10	145	30	435	250	632	10-50

6	14	20	290	60	870	60	168	10-100
8	17	20	290	60	870	80	237	10-100
10	19	20	290	60	870	100	275	10-100
12,5	22,5	20	290	60	870	125	369	10-100
16	26	20	290	60	870	160	445	10-80
19	30	20	290	60	870	190	569	10-50
25	37	20	290	60	870	250	718	10-50

Other diameters available upon request.
Weitere Abmessungen auf Anfrange möglich
Altri diametri realizzabili su richiesta.
Diğer ölçüler istek üzerine üretilebilir.



-35°C / +70°C
-31°F / +158°F

NORMS NORMEN NORME NORMLAR	ISO 1307	MARKING BESCHRIFTUNG MARCATURA MARKALAMA	INK-JET EMBOSSED	COLOUR FARBEN COLORI RENKLER	
-------------------------------------	----------	---	---------------------	---------------------------------------	--