


# Medium Duty Air

## Normal Hizmet Hava



TUBE : OIL - MIST RESISTANT NATURAL AND SYNTHETIC RUBBER.  
 REINFORCEMENT : HIGH TENSILE SYNTHETIC TEXTILE.  
 COVER : ABRASION, OZONE AND WEATHER RESISTANT SMOOTH NATURAL AND SYNTHETIC RUBBER,  
 APPLICATION : MEDIUM DUTY SERVICE FOR AIR AND PNEUMATIC TOOLS SPECIALLY IN MINES, QUARRIES AND CONSTRUCTIONS.

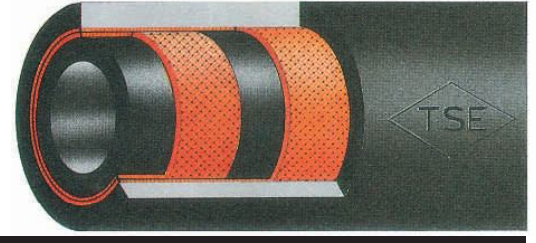

SEELE : LUFT - ÖLSPURENBESTÄNDIGER NATUR - UND SYNTHETIK-KAUTSCHUK,  
 EINLAGEN : HOCH REISSFESTE SYNTHETISCHE TEXTILEINLAGE.  
 DECKE : ABRIEBFEST- OZON- UND WITTERUNGSBESTÄNDIG, GLATT, NATUR- UND SYNTHETIK-KAUTSCHUK.  
 ANWENDUNG : GEEIGNET ALS HOCHDRUCKLUFTSCHLAUCH, SPEZIELL GEEIGNET FÜR DEN BERGBAU.



SOTTOSTRATO : GOMMA NATURALE E SINTETICA RESISTENTE A OLIO NEBULIZZATO.  
 RINFORZO : INSERZIONI TESSILI AD ALTA TENACITÀ.  
 COPERTURA : GOMMA NATURALE E SINTETICA LISCIA RESISTENTE ALL'ABRASIONE, OZONO E AGENTI ATMOSFERICI.  
 IMPIEGO : MANDATA DI ARIA COMPRESSA PER COMPRESSORI, NELLE MINIERE E CAVE.



ALT KAT : KOMPRESÖR YAĞLARINA DAYANIKLI TABİİ VE SENTETİK KAUÇUK.  
 TAKVİYE : YÜKSEK MUKAVEMETLİ SENTETİK TEKSTİL.  
 ÜST KAT : AŞINMAYA, OZONA VE HER TÜRLÜ HAVA ŞARTLARINA DAYANIKLI TABİİ VE SENTETİK KAUÇUK,  
 KULLANIM YERİ : YÜKSEK BASINÇLI HAVA NAKLİNDE, ÖZELLİKLE MADEN OCAKLARINDA.



ID/iç		OD/Dç	WP/ÇB		BP/PB		BR/KY/r	W/A	L/B
inch	mm	mm	BAR	PSI	BAR	PSI	mm	gr/mt	mt
1/4	6	14	20	290	64	928	60	172	100
5/16	8	15	20	290	64	928	80	174	100
3/8	10	18	20	290	64	928	100	242	100
1/2	13	23	20	290	64	928	125	389	100
5/8	16	26	20	290	64	928	160	456	80
3/4	19	29	20	290	64	928	190	521	50



EN ISO 2398 TYPE 4 TYPE 5

CLASS A CODE:	084	085	-25°C / +70°C	-13°F / +158°C
CLASS B CODE:	094	095	-40°C / +70°C	-40°F / +158°C

NORMS  
 NORMEN  
 NORME  
 NORMLAR

TS 745/EN ISO 2398 TYPE 4/5  
 ISO 1307

MARKING  
 BESCHRIFTUNG  
 MARCATURA  
 MARKALAMA

EMBOSSED  
 INK

COLOUR  
 FARBEN  
 COLORI  
 RENKLER

