


LPG S&D

LPG A&V



TUBE : LPG RESISTANT, CONDUCTIVE SYNTHETIC NITRILE BLACK RUBBER.
 REINFORCEMENT : HIGH TENSILE SYNTHETIC TEXTILE, STEEL WIRE HELIX AND 2 ANTISTATIC COPPER WIRES.
 COVER : ABRASION, OZONE, WEATHER, HEAT, FLAME AND OIL RESISTANT, SPECIAL PIN-PRICKED SYNTHETIC RUBBER.
 APPLICATION : TO SUCTION AND DELIVERY OF LPG.

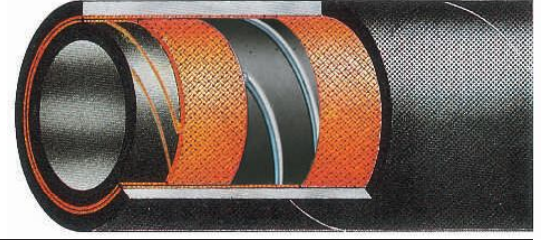

SEELE : LPG-BESTÄNDIG, ISOLIEREND, SYNTHETIKNITRIL-GUMMI SCHWARZ.
 EINLAGEN : HOCH REISSFESTE SYNTHETISCHE TEXTILEINLAGE, STAHLDRAHTSPIRALE UND 2 ANTI-STATISCHE KUPFERLITZE.
 DECKE : ABRIEB-, OZON-, WETTER-, HITZE-, UND ÖLBESÄNDIG, FLAMMWIDRIG, GEPRICKT, SPEZIELLER SYNTHETIKGUMMI.
 ANWENDUNG : LPG SAUG-UND DRUCKSYSTEME.



SOTTOSTRATO : GOMMA NITRILE NERA CONDUTTIVA, RESISTENTE AL GPL.
 RINFORZO : INSERZIONI TESSILI AD ALTA TENACITÀ CON SPIRALE METALLICA E 2 CORDICELLE DI RAME.
 COPERTURA : GOMMA SPECIALE SINTETICA NERA MICRO-FORATA, RESISTENTE AGLI OLI, ALLA FIAMMA, ALL'OZONO, ALL'ABRASIONE ED AGLI AGENTI ATMOSFERICI.
 IMPIEGO : PER ASPRAZIONE E MANDATA DI GPL.



ALT KAT : LPG'YE DAYANIKLI SIYAH İLETKEN SENTETİK NİTRİL KAUÇUK.
 TAKVIYE : YÜKSEK MUKAVEMETLİ SENTETİK TEKSTİL SPIRAL ÇELİK TEL VE STATİK ELEKTRİĞİ İLETEN ÇİFT BAKIR TEL.
 ÜST KAT : YAĞLARA, ALEVE, SÜRTÜNMEYE, HER TÜRLÜ HAVA ŞARTLARINA, OZONA VE ISIYA DAYANIKLI ÜZERİ DELİKLİ ÖZEL SIYAH SENTETİK KAUÇUK.
 KULLANIM YERİ : LPG EMME VE AKTARMA İŞLERİNDE.

ID/iÇ		OD/DÇ	WP/ÇB		BP/PB		VACUUM	BR/KY/r	W/A	L/B
inch	mm	mm	bar	psi	bar	psi	bar	mm	g/m	m
1/2"	12.7	23	25	363	100	1450	-0.80	90	434	40-46-61
5/8"	16	26	25	363	100	1450	-0.80	95	499	40-46-61
3/4"	19	31	25	363	100	1450	-0.80	100	669	40-46-61
1"	25.4	38	25	363	100	1450	-0.80	150	868	40-46-61
1 1/4"	32	45	25	363	100	1450	-0.80	200	1136	40-46-61
1 1/2"	38	52	25	363	100	1450	-0.80	280	1584	40-46-61
2"	50.8	67	25	363	100	1450	-0.80	350	2268	40-46-61
2 1/2"	63.5	81	25	363	100	1450	-0.80	480	3053	40-46-61
3"	76.2	94	25	363	100	1450	-0.80	550	3675	40-46-61
4"	101.6	120	25	363	100	1450	-0.80	720	4810	40-46-61



TYPE-SD : (-30°C / +70°C)
 TYPE-SD : (-50°F / +70°F)

NORMS NORMEN NORME NORMLAR	TS 9219 EN 1762 TYPE-SD TYPE/SD-LT ISO 1307	MARKING BESCHRIFTUNG MARCATURA MARKALAMA	TRANSFER EMBOSSED	COLOUR FARBEN COLORI RENKLER	
-------------------------------------	--	---	----------------------	---------------------------------------	--