


Petrol Pump

Akaryakıt Pompa



TUBE : OIL AND PETROL RESISTANT, SMOOTH, CONDUCTIVE SYNTHETIC NITRILE BLACK RUBBER.
 REINFORCEMENT : HIGH TENSILE SYNTHETIC TEXTILE AND ANTISTATIC COPPER WIRE.
 COVER : OIL, WEATHER, OZONE, ABRASION RESISTANT, SMOOTH SPECIAL SYNTHETIC RUBBER.
 APPLICATION : FOR FUEL DISPENSING: REGULAR AND SUPER GRADE PETROL, UNLEADED PETROL AND DIESEL OIL.

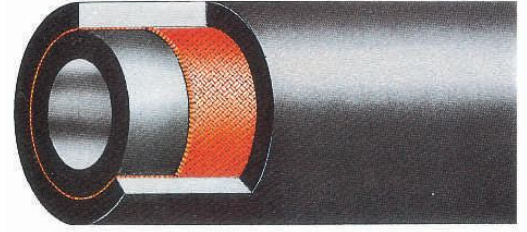

SEELE : ÖL-UND KRAFTSTOFFBESTÄNDIG, ISOLIEREND, NITRILGUMMI, SCHWARZ.
 EINLAGEN : HOCH REISSFESTE SYNTHETISCHE TEXTILEINLAGE UND KUPFERLITZE.
 DECKE : ÖL-OZON- UND WITTERUNGSBESTÄNDIG, SPEZIELLER SYNTHETIKGUMMI.
 ANWENDUNG : ZAPFSCHLAUCH FÜR TANKSTELLEN: GEEIGNET FÜR KRAFTSTOFFE, NORMAL-, SUPER-UND BLEIFREI-BENZIN UND DIESEL.



SOTTOSTRATO : GOMMA NITRILE NERA CONDUTTIVA, RESISTENTE AGLI IDROCARBURI.
 RINFORZO : INSERZIONI TESSILI AD ALTA TENACITÀ E CORDICELLA DI RAME.
 COPERTURA : GOMMA SPECIALE SINTETICA LISCIA, RESISTENTE AGLI OLI, ALL' OZONO, ALL' ABRASIONE ED AGLI AGENTI ATMOSFERICI.
 IMPIEGO : PER DISTRIBUTORI DEI CARBURANTI: BENZINA, BENZINA VERDE, GASOLIO.



ALT KAT : PETROLE, BENZİNE VE MAZOTA DAYANIKLI DÜZ, SIYAH, İLETKEN SENTETİK NİTRİL KAUCUK.
 TAKVIYE : YÜKSEK MUKAVEMETLİ SENTETİK TEKSTİL VE STATİK ELEKTRİĞİ İLETEN BAKIR TEL.
 ÜST KAT : YAĞLARA, OZONA, HER TÜRLÜ HAVA ŞARTLARINA VE AŞINMAYA DAYANIKLI ÖZEL SENTETİK KAUCUK.
 KULLANIM YERİ : SERVİS İSTASYONLARINDA, POMPALARDAN NAKİL VASİTALARINA YAKIT DAĞITMA İŞLERİNDE. (NORMAL-SÜPER-KURŞUNSUZ BENZİN, MAZOT, MOTORİN)

ID/iÇ		OD/DÇ	WP/ÇB		BP/PB		BR/KY/r	W/A	L/B
inch	mm	mm	bar	psi	bar	psi	mm	g/m	m
1/2"	12,7	21,5	16	232	48	696	127	297	+6
5/8"	16	26	16	232	48	696	160	417	+6
3/4"	19	29	16	232	48	696	190	483	+6
1"	25,4	36,5	16	232	48	696	254	692	+6



-35°C / +80°C
 -31°F / +176°F

NORMS
 NORMEN
 NORME
 NORMLAR

TS 11567 EN 1360 TİP 1
 ISO 1307

MARKING
 BESCHRIFTUNG
 MARCATURA
 MARKALAMA

INK JET
 EMBOSSED

COLOUR
 FARBEN
 COLORI
 RENKLER

